



NOTES:

1. THE EXISTING PAVING SURFACE SHALL BE SAW CUT IN A STRAIGHT LINE AT A MINIMUM OF 12" WIDER THAN UNDISTURBED SIDES OF THE TRENCH SYMMETRICAL ABOUT THE CENTERLINE OF THE EXCAVATION.
2. REPLACEMENT HMAC SURFACE LAYER SHALL BE OF THE TYPE AND THICKNESS BASED ON FUNCTIONAL CLASSIFICATION.
 - A) MIN. 2" HMAC TYPE "D" FOR TRENCH REPAIRS IN LOCAL/RESIDENTIAL STREETS.
 - B) MIN. 3" HMAC TYPE "C" FOR TRENCH REPAIRS IN COLLECTOR/ARTERIAL STREETS.
3. DAMAGED PAVEMENT OUTSIDE THE TRENCH CUT SHALL BE REMOVED AND REPLACED
4. PRIME AND TACK COAT ALL EXPOSED EDGES AND SURFACES.
5. HOT LAY BLACK BASE LAYED IN 8" LIFTS @ 95% COMPACTION.
6. IF EXCAVATION AREA IS OPEN FOR TEMPORARY PUBLIC USE, THE SURFACE SHALL BE MAINTAINED LEVEL WITH ADJACENT RIDING SURFACE WITH COLD MIX AC OR TEMPORARY HMAC.
7. CALICHE OR EXISTING MATERIAL SHALL NOT BE USED TO BACKFILL THE UTILITY EXCAVATION
8. FOR EXCAVATIONS OF EXCESSIVE DEPTH, WIDTHS GREATER THAN 3' MAY BE REQUIRED TO ACHIEVE PROPER COMPACTION.

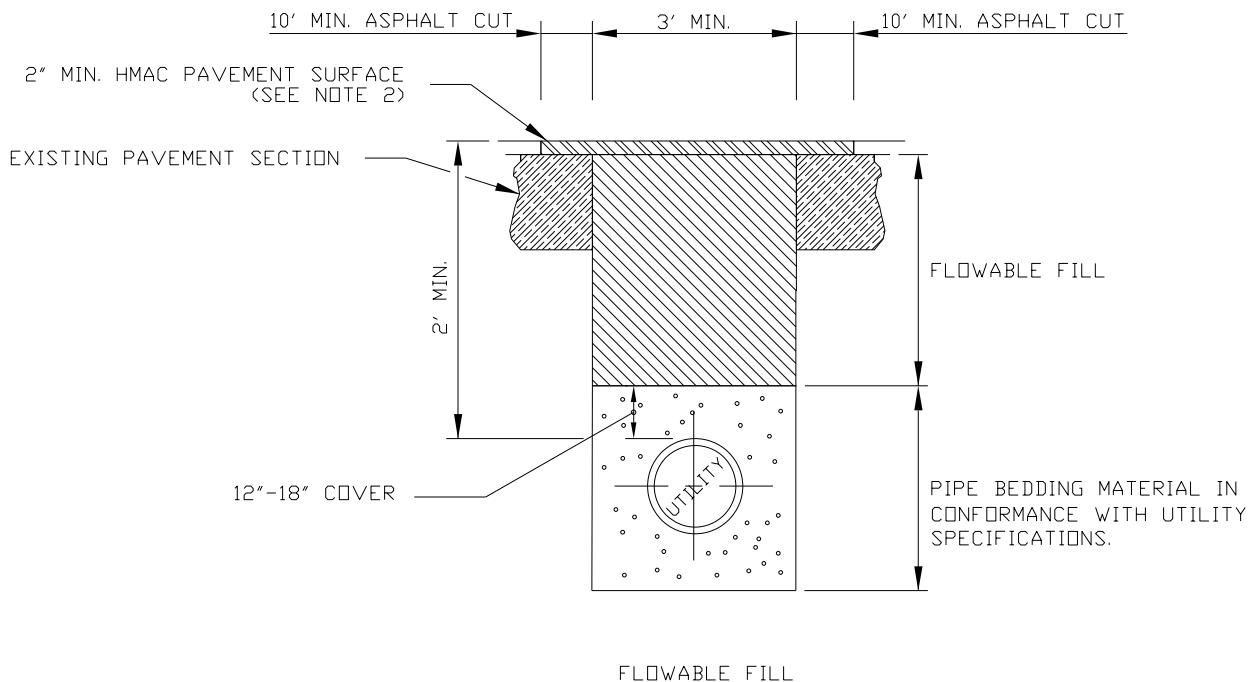

NOTES:

1. THE EXISTING PAVING SURFACE SHALL BE SAW CUT IN A STRAIGHT LINE AT A MINIMUM OF 12" WIDER THAN UNDISTURBED SIDES OF THE TRENCH SYMMETRICAL ABOUT THE CENTERLINE OF THE EXCAVATION.
2. REPLACEMENT HMAC SURFACE LAYER SHALL BE OF THE TYPE AND THICKNESS BASED ON FUNCTIONAL CLASSIFICATION.
 - A) MIN. 2" HMAC TYPE "D" FOR TRENCH REPAIRS IN LOCAL/RESIDENTIAL STREETS.
 - B) MIN. 3" HMAC TYPE "C" FOR TRENCH REPAIRS IN COLLECTOR/ARTERIAL STREETS.
3. DAMAGED PAVEMENT OUTSIDE THE TRENCH CUT SHALL BE REMOVED AND REPLACED
4. PRIME AND TACK COAT ALL EXPOSED EDGES AND SURFACES.
5. HOT LAY BLACK BASE LAYED IN 8" LIFTS @ 95% COMPACTION.
6. IF EXCAVATION AREA IS OPEN FOR TEMPORARY PUBLIC USE, THE SURFACE SHALL BE MAINTAINED LEVEL WITH ADJACENT RIDING SURFACE WITH COLD MIX AC OR TEMPORARY HMAC.
7. CALICHE OR EXISTING MATERIAL SHALL NOT BE USED TO BACKFILL THE UTILITY EXCAVATION.

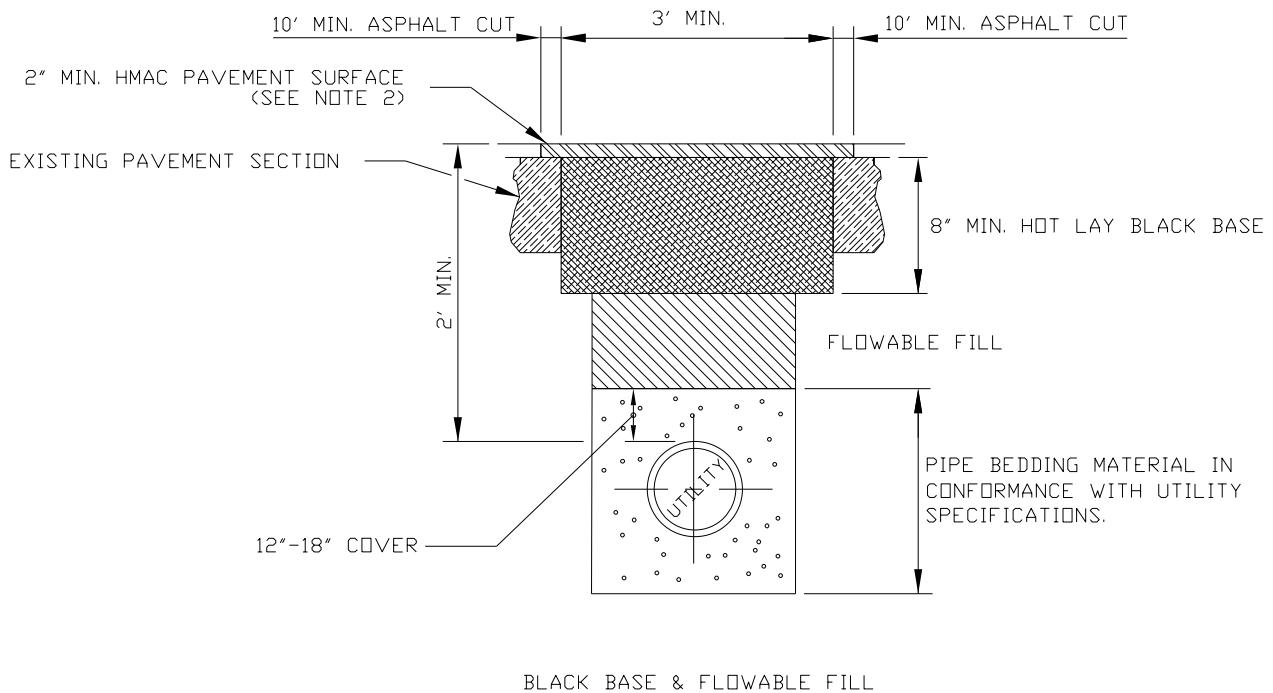

NOTES:

1. THE EXISTING PAVING SURFACE SHALL BE SAW CUT IN A STRAIGHT LINE AT A MINIMUM OF 12" WIDER THAN UNDISTURBED SIDES OF THE TRENCH SYMMETRICAL ABOUT THE CENTERLINE OF THE EXCAVATION.
2. REPLACEMENT HMAC SURFACE LAYER SHALL BE OF THE TYPE AND THICKNESS BASED ON FUNCTIONAL CLASSIFICATION.
 - A) MIN. 2" HMAC TYPE "D" FOR TRENCH REPAIRS IN LOCAL/RESIDENTIAL STREETS.
 - B) MIN. 3" HMAC TYPE "C" FOR TRENCH REPAIRS IN COLLECTOR/ARTERIAL STREETS.
3. DAMAGED PAVEMENT OUTSIDE THE TRENCH CUT SHALL BE REMOVED AND REPLACED.
4. PRIME AND TACK COAT ALL EXPOSED EDGES AND SURFACES.
5. HOT LAY BLACK BASE LAYED IN 8" LIFTS @ 95% COMPACTION.
6. IF EXCAVATION AREA IS OPEN FOR TEMPORARY PUBLIC USE, THE SURFACE SHALL BE MAINTAINED LEVEL WITH ADJACENT RIDING SURFACE WITH COLD MIX AC OR TEMPORARY HMAC.
7. CALICHE OR EXISTING MATERIAL SHALL NOT BE USED TO BACKFILL THE UTILITY EXCAVATION.